


2S Serial 16C550 RS-232, 32/64-Bit PCI card


EX-41052

Standard PCI card

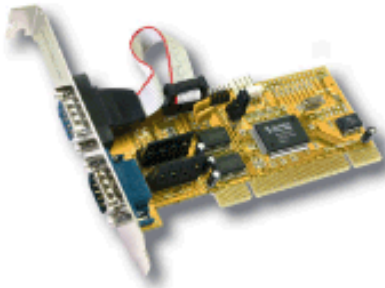

EX-41252

Low Profile PCI card

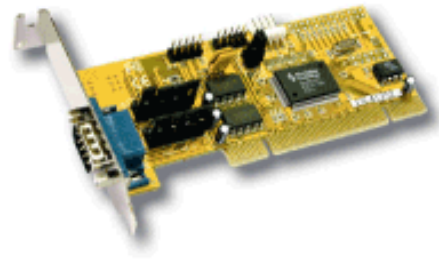

Product Description

Description :	<ul style="list-style-type: none"> - 32/64-Bit PCI Serial card with two ports - Compatible only with Motherboards what support Plug and Play - No jumper setting - Selectable +5V or +12V to the 9 Pin connector
Interface :	<ul style="list-style-type: none"> - RS-232 V.24
FIFO Buffer :	<ul style="list-style-type: none"> - 16C550 with 16-Byte buffer
I/O addresses :	<ul style="list-style-type: none"> - Setting from the operating system
IRQ :	<ul style="list-style-type: none"> - Setting from the system BIOS, Interrupt Sharing
Voltage :	<ul style="list-style-type: none"> - 5V and 3.3V
PCI-Bus :	<ul style="list-style-type: none"> - 32 or 64-Bit
Data transfer-Rate :	<ul style="list-style-type: none"> - 50 to 115.2Kbaud
Data Bits :	<ul style="list-style-type: none"> - 5, 6, 7, 8
Stop Bits :	<ul style="list-style-type: none"> - 1, 1.5, 2
Parity :	<ul style="list-style-type: none"> - None, even, odd, space, mark
Signal :	<ul style="list-style-type: none"> - TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND
Chip :	<ul style="list-style-type: none"> - 1 x 16C550 Serial chip incl. PCI-Bridge, (Netmos 9835)
Driver :	<ul style="list-style-type: none"> - DOS, Windows 9.x /NT 4.0/2000/ME/XP
Connector :	<ul style="list-style-type: none"> - 2 x 9 Pin D-SUB serial connector
EX-41052 :	<ul style="list-style-type: none"> - 2S Serial card 16C550
EX-41252 :	<ul style="list-style-type: none"> - 2S Low Profile Serial card 16C550, 8cm high for small case

General Information

Packaging contents :	<ul style="list-style-type: none"> - EX-41052 or EX-41252 Serial card 16C550 PCI 32/64-Bit - 1 x CD with driver - English manual
Operating System :	<ul style="list-style-type: none"> - DOS, WIN 9.x/NT 4.0/2000/ME, Linux 8.2
Hardware System :	<ul style="list-style-type: none"> - PCI Pentium II/III/4, AMD K6/2/3/Athlon

Operating System :	- DOS, WIN 95/NT 4.0/2000/ME, LINUX 9.4
Hardware System :	- PCI Pentium II/III/4, AMD K6/2/3/Athlon
PCB Size:	- 2 Layer / 120 x 51 mm