


4S/1P Serial/Parallel 16C950, 32/64-Bit PCI card

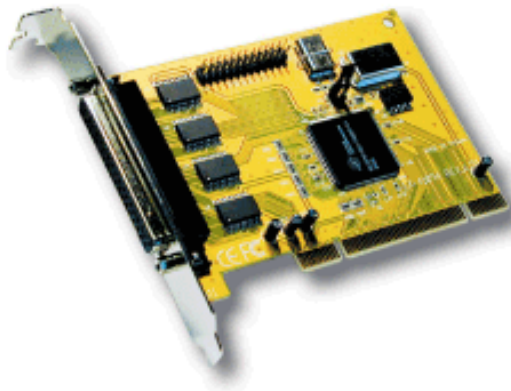

EX-41094

Product Description

| | |
|------------------------------------|--|
| Description : | <ul style="list-style-type: none"> - 32/64-Bit PCI Serial card with four serial and one parallel port - Compatible only with Mother-Boards what support Plug and Play - No jumper setting |
| <u>Serial Interface :</u> | <ul style="list-style-type: none"> - RS-232 V.24 |
| FIFO Buffer : | <ul style="list-style-type: none"> - 16C950 with 128-Byte Buffer |
| I/O addresses : | <ul style="list-style-type: none"> - Select from the operating system |
| IRQ : | <ul style="list-style-type: none"> - Select from the system BIOS, Interrupt Sharing |
| Data transfer-Rate : | <ul style="list-style-type: none"> - 50 to 921.6Kbaud |
| Data Bits : | <ul style="list-style-type: none"> - 5, 6, 7, 8 |
| Stop Bits : | <ul style="list-style-type: none"> - 1, 1.5, 2 |
| Parity : | <ul style="list-style-type: none"> - None, even, odd, space, mark |
| Signal : | <ul style="list-style-type: none"> - TxD, RxD, RTS, CTS, DTR, DSR, DCD, GND |
| Chip : | <ul style="list-style-type: none"> - 4 x 16C950 Serial/Parallel chip incl. PCI-Bridge |
| Driver : | <ul style="list-style-type: none"> - Windows 9.x/NT 4.0/2000/ME |
| <u>Parallel Interface :</u> | <ul style="list-style-type: none"> - SPP (Standard Parallel Port) - BPP (Bi-directional Parallel Port) - Parallel port can be disable |
| Data transfer-Rate : | <ul style="list-style-type: none"> - up to 770Kbyte/Sec. |
| Connector : | <ul style="list-style-type: none"> - 37 pin male to 4 x 9 Pin D-SUB serial male - 1 x 25 pin D-SUB parallel female |
| Voltage : | <ul style="list-style-type: none"> - 5V and 3.3V |
| PCI-Bus : | <ul style="list-style-type: none"> - 32 or 64-Bit |

General Information

| | |
|-----------------------------|--|
| Packaging contents : | <ul style="list-style-type: none"> - EX-41094 4S/1P Serial/Parallel card 16C950 PCI 32/64-Bit - 1 x Octopus cable with 4 x 9 pin serial connector - 1 x Slot adapter with 25 parallel connector - 1 x CD with driver - English manual |
| Operating System : | <ul style="list-style-type: none"> - Win 9.x/NT 4.0/2000/ME/XP, Linux 8.2 |
| Hardware System : | <ul style="list-style-type: none"> - PCI Pentium II/III/4, AMD K6/2/3/Athlon |

Operating System : WIN 9X/NT / 4.0/2000/ME/XP , LINUX 6.4
Hardware System : - PCI Pentium II/III/4, AMD K6/2/3/Athlon
PCB Size: - 2 Layer / 120 x 76 mm